



King Flex

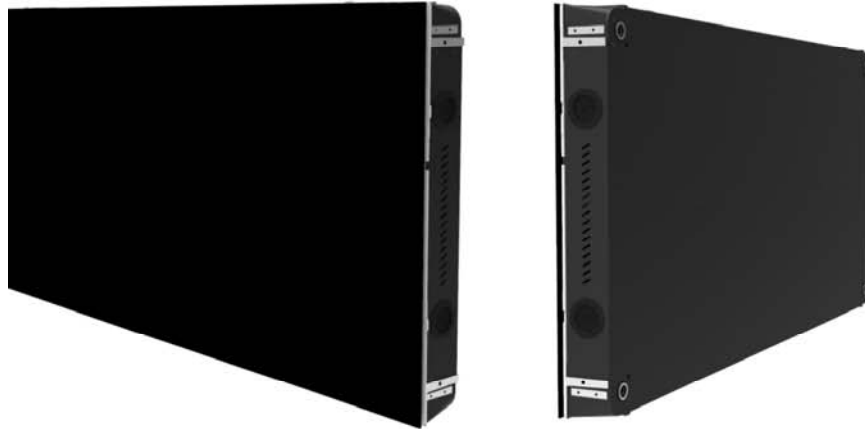

Product Feature:

- Flexible shape: Cabinet can be rotated freely and 3 different sizes of cabinet can be matched together.
- High precision and rigidity guaranteed: concave-convex chamfer.
- Directly wall-mounted design and complete front access.
- Brightness up to 2700 Nits and refresh rate up to 3840Hz to meet with all indoor applications.
- Short lead time: Large quantity of modules in stock guarantee the short lead time.

Product Diagram(Unit:mm)

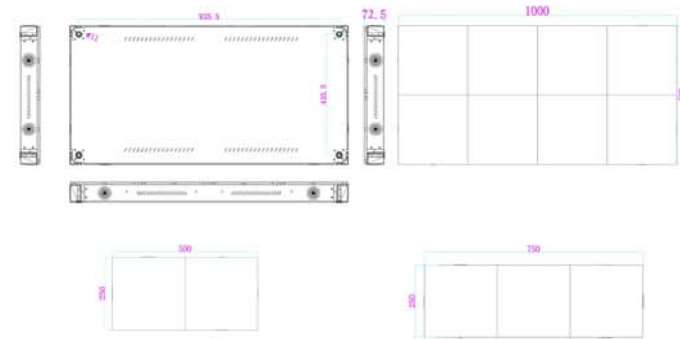

Product Specifications

Items	Parameter			
Model number	FX1.9	FX2.5	FX2	FX3
Pixel pitch	1.9mm	2.5mm	2.8mm	3.9mm
LED type	SMD1515(Black)	SMD1515(Black)	SMD2020(Black)	SMD2020(Black)
Pixel configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Size of module	250mm*250mm	250mm*250mm	250mm*250mm	250mm*250mm
Resolution of module	128*128	100*100	88*88	64*64
Density	262144dots/m ²	160000dots/m ²	123904dots/m ²	65536dots/m ²
Size of cabinet	1000mm*500mm*72.5mm/750mm*250mm*72.5mm/500mm*250mm*72.5mm			
Weight of cabinet	11.2KG/5.2KG/4.2KG			
Support hanging or not	No	No	No	No
Support front removeable or not	Yes	Yes	Yes	Yes
Best viewing distance	>2m	>2.5m	>3m	>4m
Best viewing angle	140°			
Max power consumption	700W/m ²			
Average power consumption	235W/m ²			
Colors	16.7M			
Gray scale	14bits			
Color temperature	3000-10000K			
Driving method	1/32 scanning	1/25 scanning	1/22 scanning	1/16 scanning
Refresh frequency	2400Hz			
Frame frequency	60Hz			
Control method	Synchronization			
Driving device	Constant current			
Brightness	600-800cd/m ²	600-800cd/m ²	700-2700cd/m ²	900-2700cd/m ²
Working voltage	AC220V/110V ± 10%			
Working temperature	-20°C-50°C ± 10%			
Out-of control point	<0.0001			
Brightness control	256 grade			
IP grade	IP30			
Mtbf	10,000Hours			
Life span	100,000Hours			